

10kW¹ STANDBY GENERATOR



BRIGGS & STRATTON®

THE SMART CHOICE

For the discerning homeowner that is looking for the smartest, most reliable permanent backup power solution.



Designed for Easy Installation & Maintenance

- · Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building²
- Removable roof and side panels provide better service access to the engine and alternator

Compact Size

- The smallest generator footprint in its class
- Perfect for small properties

Symphony® II Power Management System

- Customizable to your home's needs
- Automatically balances the power of your home's electrical load including high wattage items like air conditioning units and electric ovens
- Offers whole house power with a more affordable home generator

Commercial-Grade Briggs & Stratton Vanguard™ Engine

- Powerful V-Twin OHV engine
- Easy conversion between natural gas (NG) and liquid propane vapor (LP) during installation

Quality Clean Power

• Ensures your electronics are safely powered

Corrosion Resistant Enclosure & Base

- Made with automotive grade galvanneal steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions



GENERATOR SET RATINGS LIQUID PROPANE **NATURAL GAS LIMITED WARRANTY⁴** MODEL **VOLTAGE PHASE** HZ **BREAKER** LP kW LP AMPS NG kW NG AMPS PARTS, LABOR, TRAVEL Briggs & Stratton 120/240 60 50 10 41.7 9 37.5 5 Year 040375

¹ This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators)

² The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

³ Warranty details available at www.briggsandstratton.com



10kW STANDBY GENERATOR

ENGINE SPECIFICATIONS							
ENGI	NE	LUBRI	LUBRICATION				
Engine Model	Briggs & Stratton Vanguard™	Oil Capacity (oz)	48				
Engine Model Type Trim Number	359775-0003E1	Lubrication System	Full Pressure				
Engine Speed (RPM)	3600	Recommended Oil	5W30 Full Synthetic				
Engine Fuel	Liquid Propane (LP) or Natural Gas (NG)	Low Oil Pressure Sensor	Yes				
Engine Cylinder Configuration	OHV	ALTERNATOR SPECS					
Number of Cylinders	2	Manufacturer	Briggs & Stratton				
Displacement (cc)	35 / 570	Туре	Self-Excited, Rotation Field				
Bore & Stroke (in)	2.83 / 2.76	Voltage Regulator	Automatic				
Compression Ratio	8.3:1	Insulation	Class F				
Governor Type	Mechanical	CONTROLLER FEATURES					
		Hour Meter	Yes				
Frequency Regulation	+/- 2.5 Hz	LED Digital Display	Yes				
Valves	OHV with Hardened Seats						
Ignition System	Fixed Timing	Fault Code Display	Yes				
Starter Motor Rating Voltage	12 Volt	Weekly Exerciser	Yes				
Battery	12 Volt						

OPERATIONS						
FUEL CONSUMPTION ¹					SOUND RATING AT 7 METERS	
50% Load 100% Load			67 dBA			
Liquid Propane	42.8 ft³ / hr	1.19 gal / hr	65.6 ft³ / hr	1.82 gal / hr	Lowest measurement of 12 microphones around generator.	
Natural Gas	111 ft³ / hr	_	169 ft³ / hr	_	Sound level measurement at other locations around generat may be different depending upon installation configuration.	

¹ Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.






ADDITIONAL INFORMATION

OTHE	R FEATURES	CERTIFICATION		
Enclosure Material	Galvanneal Steel with Corrosion Resistant Paint	CARB Compliant	Yes	
Overcrank Protection	Yes	NFPA Approved	Yes	
Engine Warm Up (sec)	20 or 50 Automatic Transfer Switch Controlled	cUL Listed to CSA 22.2 NO 100-04	Yes	
Engine Cool Down (min)	1	NEMA Compliant	Yes	
Response Time (sec)	26 or 56 Automatic Transfer Switch Controlled EPA Certified Fuel System		Yes	
Monitoring Options Basic Wireless Monitor InfoHub™ Monitor		AVAILABLE ACCESSORIES		
Continuous Battery Charging	Yes	Maintenance Kit	6035	
WEIGHT A	ND DIMENSIONS	Cold Weather Kit	6030A	
Assembled Weight (lbs)	272	Basic Wireless Monitor	6264	
Overall Dimensions (in)	28 x 24.4 x 35.1	InfoHub	6260	
Packaged Weight (lbs)	330	Remote Status Monitor	6144	

Packaged Dimensions (in)

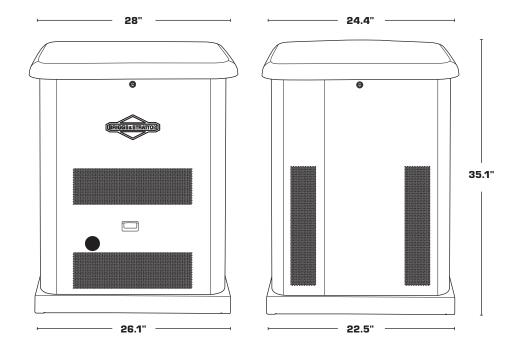

39 x 35.5 x 42



FUEL PIPE SIZE RECOMMENDATION CHART (CAPACITY IN THOUSANDS OF BTU/HOUR)

Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	118	247	466	957	1,430	2,760
40' Length*	81	170	320	657	985	1,900
60' Length*	65	137	257	528	791	1,520
80' Length*	56	117	220	452	677	1,300
100' Length*	50	104	195	400	600	1.160

Liquid Propane / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	200	418	788	1,617	2,423	4,666
40' Length*	137	287	541	1,111	1,665	3,207
60' Length*	110	231	435	892	1,337	2,575
80' Length*	101	212	400	821	1,230	2,370
100' Length*	101	212	400	821	1,230	2,370

 $^{{}^{\}star}\text{Total}$ length of piping from outlet of regulator to appliance furthest away.

ADDITIONAL INFORMATION

TRANSFER SWITCH SPECIFICATIONS				
Prewired 16 Circuit	100 AMP	Model #071076		
Standard 16 Circuit	100 AMP	Model # 071047		
Symphony® II	100 AMP	Model # 071071		
Symphony® II	150 AMP	Model # 071070		
Symphony® II	200 AMP	Model # 071068		
Voltage Rating	120/240			
N 1 (D : 10)	Select Circuit: 16			
Number of Protected Circuits	Symphony® II: Whole House			
UL Approved	Yes			
NEMA 3R Rated	Yes			

Disclaimer: Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

BRIGGS&STRATTON

POST OFFICE BOX 702 MILWAUKEE, WI 53201 USA

Copyright ©2016. All rights reserved. BS1007-H $\,$ - 11/16

SUPPORT EVERY STEP OF THE WAY

NEED HELP? Just call 800-759-2744

Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

CALL TODAY FOR A FREE IN-HOME ESTIMATE! 800-743-4115