

### 12kW<sup>1</sup> STANDBY GENERATOR



#### **BRIGGS & STRATTON®**

#### THE SMART CHOICE

For the discerning homeowner that is looking for the smartest, most reliable permanent backup power solution.



#### **Space Saving Design**

• 50% smaller than our previous 12kW generator

#### 60% Quieter<sup>2</sup>

• Re-engineered to be 60% quieter than our previous 12kW

#### **Designed for Easy Installation & Maintenance**

- Easy to move into installation location with two-wheel dolly
- Approved for installation as close as 18" to a building<sup>3</sup>
- Removable roof and side panels provide better service access to the engine and alternator

#### Symphony® II Power Management System

- Customizable to your home's needs
- Automatically balances the power of your home's electrical load including high wattage items like air conditioning units and electric ovens
- Offers whole house power with a more affordable home generator

#### Commercial-Grade Briggs & Stratton Vanguard™ Engine

- Powerful V-Twin OHV engine
- Easy conversion between natural gas (NG) and liquid propane vapor (LP) during installation

#### **Quality Clean Power**

• Ensures your electronics are safely powered

#### Corrosion Resistant Enclosure & Base

- Made with automotive grade galvanneal steel to resist rust
- Powder-coated paint for years of protection against chips and abrasions



#### **GENERATOR SET RATINGS LIQUID PROPANE NATURAL GAS LIMITED WARRANTY<sup>4</sup>** MODEL **VOLTAGE PHASE** HZ **BREAKER** LP kW LP AMPS NG kW **NG AMPS** PARTS, LABOR, TRAVEL Briggs & Stratton 120/240 60 60 12 50 10.8 41.7 5 Year 040517

<sup>&</sup>lt;sup>1</sup> This generator is rated in accordance with UL (Underwriters Laboratories) 2200 (stationary engine generator assemblies) and CSA (Canadian Standards Association) standard C22.2 No. 100-04 (motors and generators).

<sup>&</sup>lt;sup>2</sup> Based on no-load sound power.

<sup>&</sup>lt;sup>3</sup> The installation manual contains specific instructions related to generator placement in addition to NFPA 37, including the requirement that carbon monoxide detectors be installed and maintained in your home.

<sup>&</sup>lt;sup>4</sup> Warranty details available at www.briggsandstratton.com



Battery

#### **12kW STANDBY GENERATOR**

ENGINE SPECIFICATIONS						
ENG	INE	LUBR	LUBRICATION			
Engine Model	Briggs & Stratton Vanguard™	Oil Capacity (oz)	48			
Engine Model Type Trim Number	389575-0002E1	Lubrication System	Full Pressure			
Engine Speed (RPM)	3600	Recommended Oil	5W30 Full Synthetic			
Engine Fuel	Liquid Propane (LP) or Natural Gas (NG)	Low Oil Pressure Sensor	Yes			
Engine Cylinder Configuration	OHV	ALTERNATOR SPECS				
Number of Cylinders	2	Manufacturer	Mecc Alte			
Displacement (cc)	38 / 627	Туре	Self-Excited, Rotation Field			
Bore & Stroke (in)	2.97 / 2.76	Voltage Regulator	Brushless			
Compression Ratio	8.3:1	Insulation	Class H			
Governor Type	Electronic	CONTROLL	ER FEATURES			
Frequency Regulation	+/- 1 Hz	Hour Meter	Yes			
	<u> </u>	LED Digital Display	Yes			
Valves	OHV with Hardened Seats	Fault Code Display	Yes			
Ignition System	Fixed timing Magnetron® Electric Ignition	Weekly Exerciser	Yes			
Starter Motor Rating Voltage	12 Volt	vveeriy Exerciser	tes			

OPERATIONS						
FUEL CONSUMPTION <sup>1</sup>					SOUND RATING AT 7 METERS	
50% Load 100% Load			69 dBA			
Liquid Propane	62.1 ft³ / hr	1.7 gal / hr	83.8 ft³ / hr	2.3 gal / hr	Lowest measurement of 12 microphones around generator.	
Natural Gas	117 ft <sup>3</sup> / hr	_	172 ft³ / hr	_	Sound level measurement at other locations around genera may be different depending upon installation configuration.	

<sup>&</sup>lt;sup>1</sup> Fuel consumption rates are estimated based on normal operating conditions. Generator operation may be greatly affected by elevation and the cycling operation of multiple electrical appliances – fuel flow rates may vary depending on these factors.

12 Volt






#### **ADDITIONAL INFORMATION**

OTHER FEATURES			
Closure Material Galvanneal Steel with Corrosion Resistant Paint			
vercrank Protection Yes			
20 or 50 Automatic Transfer Switch Controlled	cUL Listed to CSA 22		
1	NEMA Compliant		
26 or 56 Automatic Transfer Switch Controlled	EPA Certified Fuel Sy		
Basic Wireless Monitor InfoHub™ Monitor	ı		
Yes	Maintenance Kit		
WEIGHT AND DIMENSIONS			
318	Basic Wireless Monit		
28 x 24.4 x 37.2	InfoHub		
345	Remote Status Moni		
	Galvanneal Steel with Corrosion Resistant Paint  Yes  20 or 50 Automatic Transfer Switch Controlled  1  26 or 56 Automatic Transfer Switch Controlled  Basic Wireless Monitor InfoHub™ Monitor  Yes  DIMENSIONS  318  28 x 24.4 x 37.2		

CERTIFICATION					
CARB Compliant	Yes				
NFPA Approved	Yes				
cUL Listed to CSA 22.2 NO 100-04	Yes				
NEMA Compliant	Yes				
EPA Certified Fuel System	Yes				
AVAILABLE ACCESSORIES					
Maintenance Kit	6035				
Cold Weather Kit	6348				
Basic Wireless Monitor	6264				
InfoHub	6260				
Remote Status Monitor	6144				

Packaged Dimensions (in)  $39 \times 35.5 \times 45$ 

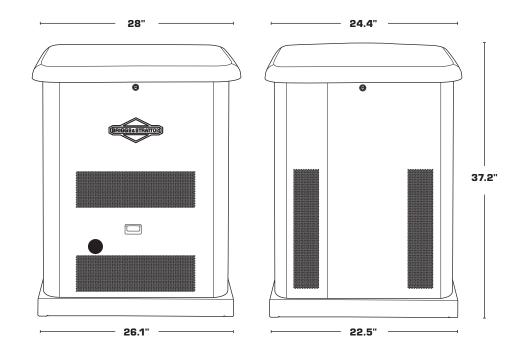



#### FUEL PIPE SIZE RECOMMENDATION CHART (CAPACITY IN THOUSANDS OF BTU/HOUR)

	Natural Gas / Inlet Pressure less than 2 PSI / Pressure Drop 1/2" Water Column / Specific Gravity 0.60						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity	
20' Length*	118	247	466	957	1,430	2,760	
40' Length*	81	170	320	657	985	1,900	
60' Length*	65	137	257	528	791	1,520	
80' Length*	56	117	220	452	677	1,300	
100' Length*	50	104	195	400	600	1.160	

Liquid Propane / Inlet Pressure 11" Water Column / Pressure Drop 1/2" Water Column / Specific Gravity 1.50						
	1/2" pipe capacity	3/4" pipe capacity	1" pipe capacity	1-1/4" pipe capacity	1-1/2" pipe capacity	2" pipe capacity
20' Length*	200	418	788	1,617	2,423	4,666
40' Length*	137	287	541	1,111	1,665	3,207
60' Length*	110	231	435	892	1,337	2,575
80' Length*	101	212	400	821	1,230	2,370
100' Length*	101	212	400	821	1,230	2,370

 $<sup>{}^{\</sup>star}\text{Total}$  length of piping from outlet of regulator to appliance furthest away.

#### **ADDITIONAL INFORMATION**

TRANSFER SWITCH SPECIFICATIONS				
Prewired 16 Circuit	100 AMP	Model #071076		
Standard 16 Circuit	100 AMP	Model # 071047		
Symphony® II	100 AMP	Model # 071071		
Symphony® II	150 AMP	Model # 071070		
Symphony® II	200 AMP	Model # 071068		
Voltage Rating	120/240			
	Select Circuit: 16			
Number of Protected Circuits	Symphony® II: Whole House			
UL Approved	Yes			
NEMA 3R Rated Yes				

**Disclaimer:** Not for Prime Power or use where standby systems are legally required, for serious life safety or health hazards, or where lack of power hampers rescue of fire-fighting operations.

#### **BRIGGS&STRATTON**

POST OFFICE BOX 702 MILWAUKEE, WI 53201 USA

Copyright ©2016. All rights reserved. BS1007-I  $\,$  - 11/16

## SUPPORT EVERY STEP OF THE WAY

NEED HELP? Just call 800-759-2744

Our technical support team is trained to answer questions on our generators, transfer switches and accessories.

# CALL TODAY FOR A FREE IN-HOME ESTIMATE! 800-743-4115